


CDM43 Specifications



CRVD viewing area 240% of 4:3 & 180% 16:9

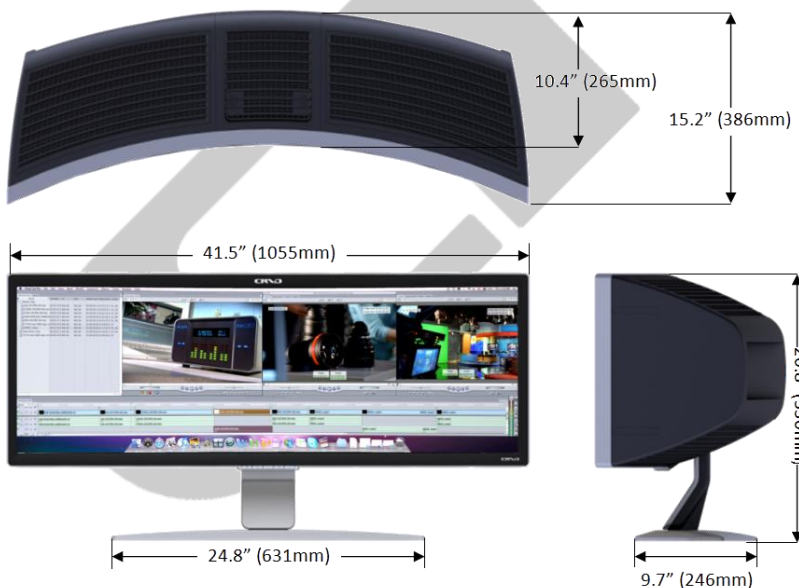

MODEL	CDM43
Diagonal	43"
Native Resolution	2880 x 900 – Double WXGA+
Curved Seamless Image	Yes
Response Time	<0.02milliseconds
Dynamic Range	12-bit - 4,096 levels
Color Gamut (typical)	<u>Coverage</u> <u>Size</u>
sRGB	100% 160%
Adobe RGB	99.3% 119%
Number of Colors	68.7 billion
Contrast	>10,000:1
Brightness (peak)	≥200 nits
Field of View	H90°@ 24" x V30° @ 24"
Screen Dimensions (flat)	W: 40.8" x H: 12.8"
Pixel Pitch	0.36mm, 71 DPI
Aspect Ratio	32 : 10
Monitor Weight (no stand)	45.5 lbs (20.7 kg)
Stand Weight	7 lbs (3.2 kg)
Packaged Weight	72 lbs (32.6 kg)
Packaged Size	51" L, 24" W, 30" H (1.3m L, 0.61m W, 0.76m H)
Input	Single link DVI-D & HDMI
Input Power (nominal)	110VAC @60Hz / 220VAC @50Hz
Power Consumption	~200W (2 amps max)
Operating Environment	41°F (5°C) to 95°F (35°C) Operating Relative Humidity 20% to 80% (w/o condensation) Operating Altitude Up to 10,000 ft (3,048 m) above sea level
Storage Environment	-4°F (-20°C) to 140°F (60°C)

All features, specifications, and model numbers are subject to change without notice.
All on-screen images are simulated pictures. Class 1 LED Product.
CRVD™ & Ostendo™ are registered trademarks of Ostendo Technologies, Inc.